


CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #ORY-1007-AG-CL

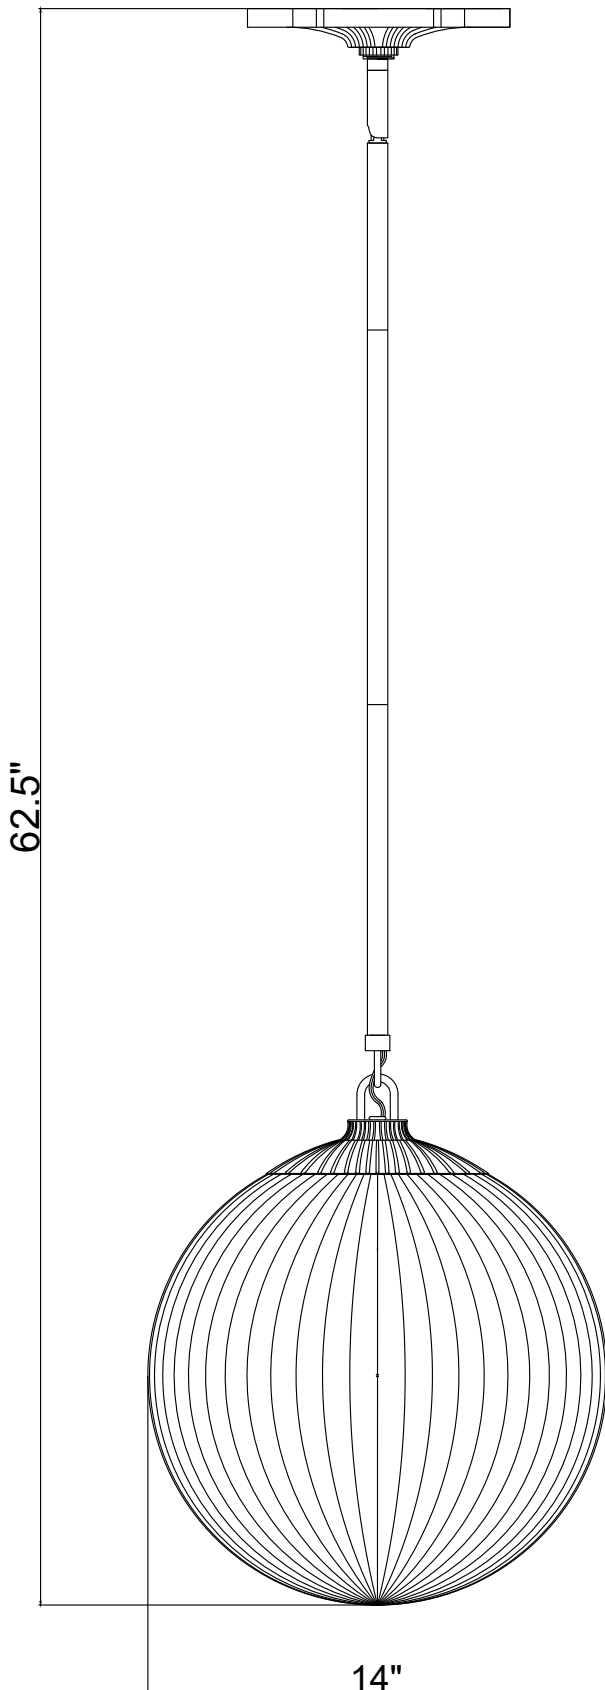

WARNING:




Electrical Danger



Turn Power off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 1- Medium Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
This fixture is Damp rated.

How to install:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.


1. Decide the preferred hanging height and choose the correct length of rods needed.
2. Feed the wire through the rods and connect them together. Continue running the wire through the collar loop, canopy, and the swivel. Screw the swivel onto the top of the rod assembly.
3. Install the mounting bracket onto the outlet box.
4. Raise the fixture up to the ceiling and do the wire connections. Secure the canopy with the collar ring.
5. Install the bulb (not included) into the socket.
6. Twist and lock the glass shade onto the lamp body.

 **WARNING:** This product can expose you to Lead, which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #ORY-1007-AG-CL

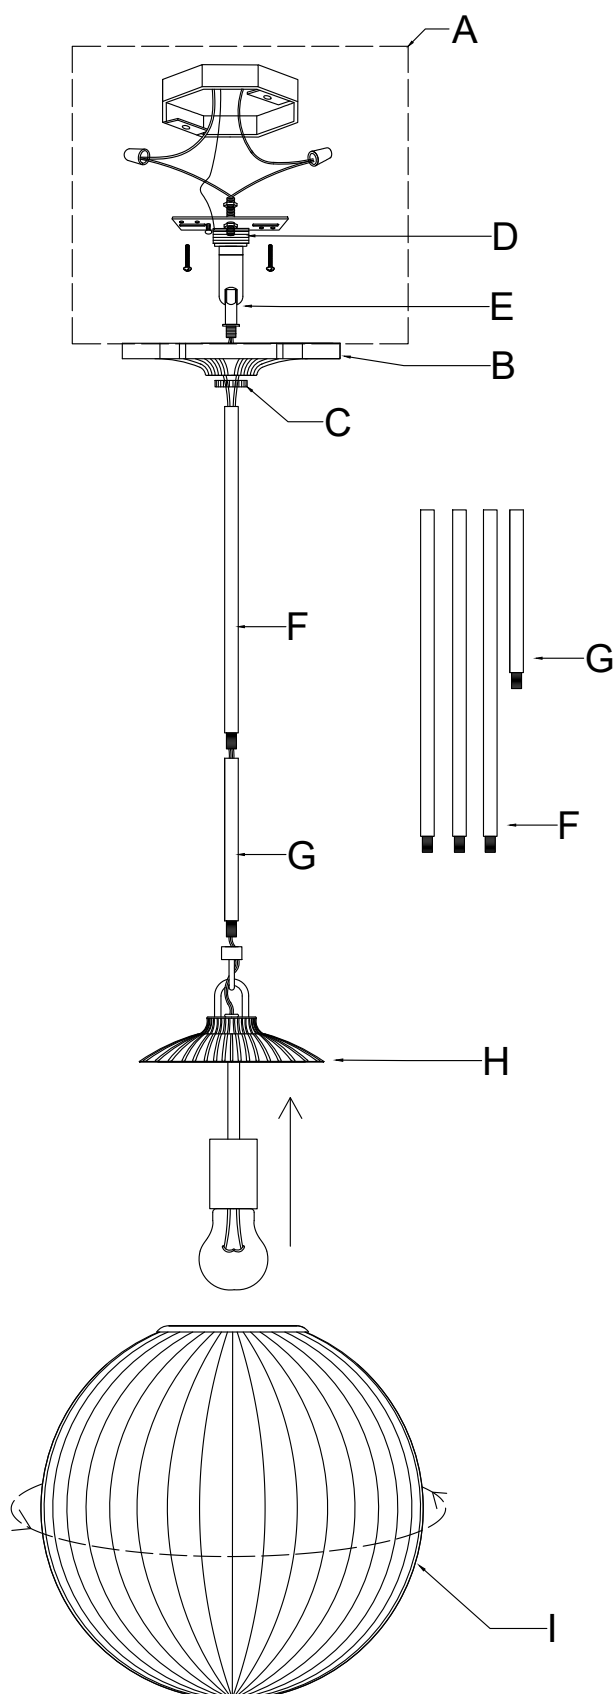

Part Number

Part Number

- A.(1)-Mounting hardware
Wire Connector ×2.
Mounting bracket ×1.
Machine Screw ×2.
Threaded pipe ×1.
Nut ×2
Washer ×1.
- B.(1)-Canopy; Ø8"; W5 7/8", H5 7/8"
-XSN1007AGCAN8IN
- C.(1)-Collar Ring
- D.(1)-Collar Loop
- E.(1)-Swivel
- F.(3)-Rod ; H12"-XSN1007AGROD12IN
- G.(1)-Rod ; H6"-XSN1007AGROD6IN
- H.(1)-Lamp body kit
Loop
U-arm
Metal Cover ; Ø6 3/4"
Tube ; H2 3/4"
Socket
Retaining ring ; Ø4 3/4"
- I.(1)-Glass shade ; Ø14"
-XSN1007AGCLGLA14IN